

# CORPURI DE ILUMINAT LED, DE PERETE, CU PANOU FOTOVOLTAIC






TRACON			Tc [K]		P <sub>max</sub>	L × W × H (mm)	
<b>LSLBB3W</b>	3,2 W	400 lm	4.000 K	3,7 V / 2 Ah Li-ion	2,3 Wp	212 × 140 × 110	
<b>LSLBW3W</b>	3,2 W	400 lm	4.000 K	3,7 V / 2 Ah Li-ion	2,3 Wp	212 × 140 × 110	
<b>LSLBB7W</b>	6,8 W	800 lm	4.000 K	3,7 V / 4 Ah Li-ion	4,4 Wp	270 × 221 × 110	
<b>LSLBW7W</b>	6,8 W	800 lm	4.000 K	3,7 V / 4 Ah Li-ion	4,4 Wp	270 × 221 × 110	




LSLBB..




LSLBW..

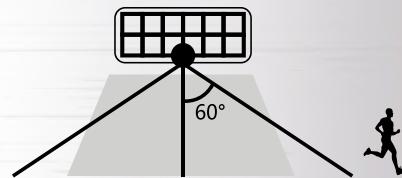


Pornire și oprire,  
Alegerea modului de funcționare  
(modul funcționare A, B sau C)



**Modul de funcționare „A”:**  
Se aprinde automat în întuneric,  
și luminează timp de 5 ore cu  
20% din fluxul luminos.



**Modul de funcționare „B”:**  
Se aprinde automat în întuneric  
când se detectează mișcare și  
luminează cu 100% flux luminos.  
Dacă nu se detectează mișcare  
timp de 20 secunde comută pe  
iluminare 3%.



**Modul de funcționare „C”:**  
Se aprinde automat în întuneric  
când se detectează mișcare și  
luminează cu 100% flux luminos.  
Dacă nu se detectează mișcare  
timp de 30 secunde decuplează.